

PRODUCT CATALOGUE



WOODWORKING EQUIPMENT





PROUD PRODUCT SPONSOR

PRODUCT INDEX

			8-
MITRE SAWS	SIP 10" Sliding Compound Mitre Saw	01511	4
	SIP 12" Sliding Compound Mitre Saw	01504	4
SCROLL SAW	SIP 16" Flexi-Drive Scroll Saw	01947	5
TABLE SAWS	SIP 10" Table Saw with Stand	01986	6
	SIP 10" Professional Cast Iron Table Saw	01332	7
	SIP Sliding Carriage for 01332	01495a	7
	SIP 12" Professional Cast Iron Table Saw	01446	8
	SIP Sliding Carriage for 01446	01447	8
BAND SAWS	SIP 14" Professional Band Saw	01444	9
	SIP 16" Professional Band Saw	01445	9
PLANER /	SIP 6" Planer	01543	10
THICKNESSERS	SIP 8" x 6" Planer/Thicknesser	01552	10
SPINDLE MOULDER	SIP Professional Spindle Moulder	01456	11
	SIP Sliding Carriage for 01456	01457	11
WOOD LATHES	SIP Variable Speed Midi Wood Lathe	01936	12
& ACCESSORIES	SIP 12" x 36" Swivel Head Wood Lathe	01938	12
	SIP 14" x 43" Cast Iron Wood Lathe	01940	13
	SIP Outboard Turning Attachment for 01940	01951	13
	SIP 6 Piece Chisel Set	06857	12
	SIP Wood Turning Chuck Set	06851	13
	SIP 4" Chuck Set	06853	13
MORTICERS	SIP Bench Morticer	01942	14
	SIP Bench Morticer with Sliding Table	01944	14
	SIP Heavy-Duty Morticer with Cabinet	01950	15

				0
SANDERS	SIP 12" Disc Sander	01953	200	16
	SIP 4" x 8" Belt & Disc Sander	01946		16
	SIP 6" x 10" Belt & Disc Sander	01950	1	17
	and a factor of the	1 Contraction		34
ROUTER &	SIP 1500W Router	01978		18
SCUIT JOINTER	SIP Biscuit Jointer	07904		18
	NACESCONDING TO THE STATE	14 A. 18	1	1
T COLLECTORS	SIP 50 Litre Dust & Chip Collector	01923	1	19
	SIP 1HP Dust Collector	01924	1	20
	SIP 1HP Dust Collector with Vacuum Attachment	01952	1	20
	SIP 3HP Dust Collector - Two Bag	01954	14	21
	SIP 4HP Dust Collector - Four Bag	01956		22
				H
SAW STAND	SIP Universal Saw Stand	01958		23
WORKBENCH	SIP Oak Woodworking Bench	01441		23
OLLER STANDS	SIP Single Roller Stand	01379	Sec.	24
W LOG HORSE	SIP V-Type Roller Ball Stand	01393		24
HAINSAW LOG	SIP 5 Roller Stand	01381		24
HORSE	SIP Saw Log Horse	01973		25
	SIP Chainsaw Log Horse	01979		25
		04007	1	00
OG SPLITTERS	SIP 5 Ton Log Splitter	01967	1	26
	SIP 5 Ton Log Splitter with Stand	01967PC	11	26
	SIP 7 Ton Log Splitter	01977	100	27
ACCESSORIES	Dust Collector Consumables	14	11	28
	Table Saw Accessories	I ALL		28
	Saw Stand Accessories	- B.B	1.34	28
	Circular, Bandsaw, Scroll Saw, Planer Blades	10 10	29 -	31
	Sanding Belts and Discs	1. 30	16	32
	Morticing Chisels	1		32
		100 2		110

Item No: Page



Item No: Page

BIS DUST

> RO SA CI

ENGINEERING ADVENTURE



SIP Industrial Products are incredibly proud to provide multiple product sponsorship for the Bloodhound SSC project, a British-based supersonic car aiming to smash the land speed record in pursuit of 1000mph, with trials already underway. SIP are fully behind this inspiring event. For more information, visit sip-group.com PROUD PRODUCT SPONSOR

WE ARE SIP

SIP Industrial Products... Providing our customers with expertise, quality and choice since 1968

SIP Industrial Products have become a flagship supplier of high quality equipment and machinery for a range of different industries, and even though we're 50 years old, it's a value we have upheld since day one. With that in mind, SIP are proud to supply and service the ever-growing industries of engineering, construction, automotive, and agricultural machines marketplaces, just to name a few.

While we may have made our name for being renowned specialists in welding, metalworking, and compressed air products, it is another of our classic ranges that continues to be popular throughout the UK and worldwide. The range is constantly being upgraded and refined to ensure that whatever the task at hand is, SIP stock a heavy-duty product to complete the job while performing to the highest possible standard.


Our Woodworking range caters for all applications, whether for amateur home users or large scale operations, SIP woodworking products are designed with all domestic, trade, and professional users. This covers everything from circular and bandsaws, sanders, to dust collectors and log splitting equipment, meaning that the woodworking process can handled from start to finish with reliable SIP machinery.

We are dedicated to making sure you get the right product model for the task at hand, and we will do everything we can to assist you in making the right decision. All this is backed up by our worldclass service and engineering technicians at our headquarters near Loughborough, Leicestershire.

Reliable equipment, value, and choice make SIP Industrial Products the machinery specialists today, just as it was 50 years ago.

Sip

Sip

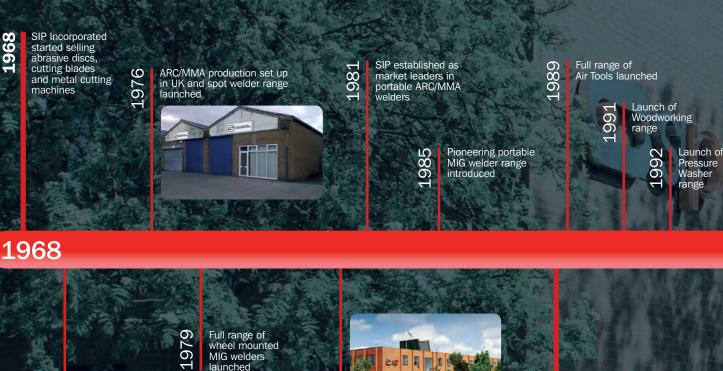

Introduced pioneering air cooled ARC/MMA welders introduced into the range

0

launched

80 Ő.



20 YEARS õ of success celebrated

SIP INDUSTRIAL PRODUCTS LIMITED

SIP began life as a small operation selling cut industrial abrasives, circular metal cutting saws and blades to a handful of distributors from two very small units on Radnor Road, Wigston, in the heart of Leicester. This operation grew and cemented SIP as a respected local firm, and fuelled a period of expansion, which, in turn, allowed SIP to fill empty gaps in the market and give customers everything that they needed.

This is showcased through bringing in outside ARC/MMA welders in to our full range in 1972 - just 4 years into trading. This made the remainder of the 70s very prosperous, and saw the launch of an in-house production of ARC/ MMA welders and a new range of wheel-mounted MIG welders. SIP were launching new welders and equipment whilst always at the forefront of technology, and soon added air direct and beltdrive air compressors to their collection in 1977.

The SIP range of ARC/MMA welders established SIP as market leaders and in 1981 - shortly after moving into a new purpose built 65,000ft2 plant in Shepshed, Leicestershire, just off J23 of the M1. The company as a whole had become a flagship firm, the go-to for good quality craftsmanship and engineering, and a respected name among merchants, distributors and tradesmen alike.

As well as supplying customers across the UK, SIP soon opened their dedicated department for Export, supplying to the likes of Australia and the U.S. by the end of the 1980s, and into 20 countries worldwide by 1996. During this time,

SIP had expanded their stock range and by the early 1990s, air tools, woodworking machinery and pressure washers had all been added. A further extension in 1994 to their headquarters in Leicestershire meant SIP could grow the business further.

By the turn of the millennium, SIP were already 32 years old, but the next years would prove instrumental to the success of SIP. That very same year, SIP sold their landmark 250,000th welder, and just three years of hard work later, SIP had doubled their customer base.

All this experience sees SIP still at the pinnacle of technology and engineering, and continuing to provide user-friendly, top quality products and an efficient, straightforward after-sales support service. Recent years have included an entire new range of air compressors - the largest in the UK - with a full range of 10,000 spare parts to service and support these and everything else that we stock.

After 50 years, SIP, have not slowed down. This year sees the roll-out of dedicated service vehicles, so we are able to come and visit

the customer on-site to make sure your SIP equipment is performing as it did when it left the factory. It's also seen the launch of SIP's 1000th product!

Continuing on this growth path, SIP will have sold in excess of 5,000,000 products by the end of 2018.

A lot has changed since 1968. Something that has stayed exactly the same is the SIP commitment to manufacturing and supplying machinery and equipment, from welders to lights to booster packs, to people around the UK and worldwide. SIP still take the utmost care and are constantly striving to provide quality, value and choice.

SIP Industrial Products - 50 years and counting!

2

SIP TIME-LINE



MITRE SAWS

SIP 10" Sliding Compound Mitre Saw with Laser ITEM NO: 01511

The SIP 10" Sliding Compound Mitre Saw allows versatility coupled with excellent value. With an integrated laser for added accuracy, the saw also boasts large cutting capacities cutting straight, mitre, left and right bevel and left and right compound mitre cuts.

Key Features:

MITRE SAWS

- · Integrated laser for added accuracy
- Automatically retracting lower blade guard for added safety
- · Adjustable depth stop for tenoning and trenching
- Dust extraction bag for cleaner, safer use
- Sliding action for increased cutting capacity
- Pre-set stops at the common mitre angles (left & right): 0°, 15°, 22.5°, 30° & 45°

MODEL	SIP 10" SLIDING COMPOUND MITRE SAW WITH LASER	
PRODUCT CODE	01511	
Motor	2.7 HP (2 kW)	
Supply	230 V (13 A)	
Mitre Range	-45° / 0° / +45°	
Cutting Capacities:		0
Straight Cut @ 0° x 0°	340 x 80 mm	
Mitre Cut @ 45° x 0°	240 x 80 mm	
Bevel Cut @ 0° x 45°	340 x 50 mm	0
Compound Mitre Cut @ 45° x 45°	240 x 50 mm	
Blade Diameter	254 mm	_
Blade Bore	30 mm	_ <
Blade Teeth / Type	40 / TCT	
Blade Speed	5500 rpm	
Weight	18 kg	0
Packaged Dimensions	390 x 550 x 810 mm	2
Barcode Number	5012713015115	U

SIP 12" Sliding Compound Mitre Saw with Laser Double-Bevel, Belt-Driven ITEM NO: 01504

A powerful saw with a 2000w belt driven-motor for smoother, quieter operation and extended life.

Double bevel facility 45° left and right

This 12" saw is ultra-versatile, with double bevel action 45° left and right. The 305mm blade allows a impressive straight-cut cutting capacity of 340mm width x 102mm depth.

Laser guidance improves cutting accuracy.

Key Features:

- Belt-driven for smoother quieter operation and extended motor life
- Automatic retracting lower guard for increased safety
- Adjustable depth stop for tenoning or trenching
- Sturdy rotating table with pre-set stops: 0°, 15°, 22.5°, 30° and 45°
- · Dust extraction bag for cleaner, safer use

MODEL	SIP 12" SLIDING COMPOUND MITRE SAW WITH LASER, DOUBLE BEVEL
PRODUCT CODE	01504
Motor	2.7 HP (2 kW)
Supply	230 V (13 A)
Mitre Range	-45°/0°/+45°
Cutting Capacities:	
Straight Cut @ 0° x 0°	340 x 102 mm
Mitre Cut @ 45° x 0°	240 x 102 mm
Bevel Cut @ 0° x 45°	340 x 55 mm (Left) / 340 x 40 mm (Right)
Compound Mitre Cut @ 45° x 45°	240 x 55 mm (Left) / 240 x 40 mm (Right)
Blade Diameter	305 mm
Blade Bore	30 mm
Blade Teeth / Type	40 / TCT
Blade Speed	4500 rpm
Weight	21 kg
Packaged Dimensions	530 x 575 x 910 mm
Barcode Number	5012713015047



SCROLL SAW

SIP 16" Flexi-Drive Scroll Saw ITEM NO: 01947

The SIP Scroll Saw has a parallel arm design and is perfect for cutting intricate curves while keeping an accurate 90° edge. The robust, cast iron, rounded edge table can be tilted 45° to the left and right. To keep machine downline to a minimum, the machine has a quick-change blade system. Variable speed allows adjustment to suit the task and material in hand. Slower speeds can be used for the cutting of plastic and non-ferrous metals, while faster speeds can be used for cutting wood up to 50mm thick.

Key Features:

- Cast iron round-ended table can be tilted 45° left and right
- · Integrated dust blower for fast and easy clearing of saw dust
- Integrated fully adjustable flexible work light
- Flexi-Drive tool
- · Safety guard for safe and unhindered cutting
- A full 64-piece grinding, polishing, and sanding kit is included to make fine-tuning and adjustments possible



64 piece grinding, polishing

Integrated air blower

Blade set guide



Easy-to-use variable speed control



Integrated flexi-tool



and sanding kit

16"

roll

NVR SWITCH

2 YEAR WARRANTY

You Tube

Search: SipTechZono

SIP SALES: Tel: 01509 500500

Fax: 01509 500456 Email: sales@sip-group.com

TECHNICAL / AFTERSALES: Tel: 01509 500400 Fax: 01509 500456 Email: technical@sip-group.com

SIP 16" FLEXI-DRIVE SCROLL SAW	
01947	
0.12 HP (90 W)	S
230 V (13 A)	
406 mm	
15 mm	C
500 to 1600 stokes/min	=
420 x 270 mm	
0° to 45° (Left & Right)	C
240 x 55 mm (Left) / 240 x 40 mm (Right)	\supset
50 mm	
13 kg	CIFICATION
670 x 280 x 420 mm	Z
5012713019472	S CO
	01947 0.12 HP (90 W) 230 V (13 A) 406 mm 15 mm 500 to 1600 stokes/min 420 x 270 mm 0° to 45° (Left & Right) 240 x 55 mm (Left) / 240 x 40 mm (Right) 50 mm 13 kg 670 x 280 x 420 mm

TABLE SAWS

SIP 10" Table Saw with Stand ITEM NO: 01986

This versatile table saw has a large extruded aluminium table and is supplied with one rear and two side extension tables. It has a sturdy blade guard and an accurate quick-lock rip fence with precision mitre guide.

0000

8

Key Features:

- Supplied with: 10" TCT Saw Blade
- Rise and fall tilting arbor
- Overload button for motor protection
- Both stand and rear table included
- Complete with mitre guide and push stick

NVR SWITCH

2 YEAR WARRANTY

SPECIFICATIONS

WODEL	SIF 10 IADLE
PRODUCT CODE	01986
Motor	2.4 HP (1.8 kV
Supply	230 V (13 A)
Maximium Depth of Cut @ 45°	65 mm
Maximium Depth of Cut @ 90°	85 mm
Table Size with Extensions	940 x 640 mm
Blade Diameter	254 mm
Blade Bore	30 mm
Blade Teeth / Type	24 Teeth / H.S
Blade Speed	5000 rpm
Weight	25 kg
Packaged Dimensions	390 x 550 x 8
Barcode Number	50127130198

L	SIP 10" TABLE SAW WITH STAND
E	01986
or	2.4 HP (1.8 kW)
у	230 V (13 A)
0	65 mm
о	85 mm
s	940 x 640 mm
er	254 mm
е	30 mm
е	24 Teeth / H.S.S.
d	5000 rpm
nt	25 kg
s	390 x 550 x 810 mm
er	5012713019861

Don't forget ACCESSORIES & CONSUMABLES See page 29

6

PROFESSIONAL TABLE SAWS

SIP 10" Professional Cast Iron Table Saw ITEM NO: 01332

This saw has a large cast iron table to ensure accuracy and comes complete with two extension tables, a cabinet stand and top extraction pipe. For added speed and accuracy the saw has a sturdy, full-length rip fence with a 'Quick-lock' micro adjustable lock.

The machine has a heavy-duty cast mitre fence. Effective dust extraction is via a 100mm outlet.

Key Features:

- · Supplied with: 10" TCT Saw Blade
- · Fine adjustment for rise and fall saw blade with lock
- 45° adjustable blade with blade lock
- Extension tables can be mounted one each side when sliding carriage is not fitted
- 'T' slotted cast mitre guide included



Quick-lock adjustable

rip fence



Accurate 0º - 45º arbor

Heavy-duty cast mitre guide



F&C

WOODWORKING





"After setting up, trial cuts were very impressive. Being able to crosscut 8' x 4' sheets make this saw an exceptional piece of equipment. When you consider the cost of the whole set-up (saw & sliding carriage) - bearing in mind the superb quality and large capacities..... Highly recommended."

SIP Sliding Carriage for 10" Cast Iron Table Saw ITEM NO: 01495a

Increases table saw capacity to cross-cut 8 ft x 4 ft sheets in one pass.

· Micro adjustable cross-cut stop to 1 metre

Roger Berwick

- Pre-set stops at 90° and 45°
- · Large cast table working area
- Heavy duty construction
- Quick release clamp

s	WITCH	2 TEAR WARRANTY	
MODEL	SIP 10" CAST IR	ON TABLE SAW	
PRODUCT CODE	01332		
Motor	3 HP (2.2 kW)		
Supply	230 V (16 A)		
Maximium Depth of Cut @ 45°	53 mm	9	
Maximium Depth of Cut @ 90°	75 mm		
Maximium Distance Blade to Fence with Extensions	1060 mm	Contraction of the	
Table Size (W x D)	560 x 800 mm	And St.	
Table Size with Extensions (W x D)	1170 x 800 mm		
Blade Tilt	45° to Left		
Blade Diameter	254 mm	C AN	
Blade Bore	25.4 mm		C
Blade Speed	4800 rpm		_
Table Height	845 mm		C
Weight	177 kg		
Packaged Dimensions	480 x 620 x 900	mm	-
Barcode Number	5012713013326	5	ILICATION
OPTIONAL ACCESSORIES			2
Sliding Carriage	01945a		-
Weight	34 kg		C
Packaged Dimensions	320 x 110 x 250	D mm	
Barcode Number	5012713019458	3	C

PROFESSIONAL TABLE SAWS

SIP 12" Professional Cast Iron Table Saw ITEM NO: 01446

This saw has a large cast iron table to ensure accuracy and comes complete with two extension tables, a cabinet stand and top extraction pipe. For added speed and accuracy the saw has a sturdy, full-length rip fence with a 'quick-lock' micro adjustable lock.

The machine has a heavy-duty cast mitre fence. Effective dust extraction is via a 100mm outlet.

Key Features:



PROFESSIONAL BANDSAWS

SIP 14" Professional Bandsaw ITEM NO: 01444

This saw has a powerful 2hp motor and dual speeds to make it ideal for work in high output workshops - professional or serious amateur. Dual speeds make the machine suitable for cutting all types of wood, plastic and non-ferrous metal. The saw has fully adjustable blade tensioning and tracking for precise and friction free cutting action.

Key Features:

- · Supplied with: 12mm Blade and floor stand!
- Powerful dust extraction
- · Rack and pinion rise and fall ball-bearing guides
- · Large precision ground, cast iron table
- · Cast mitre guide and 'Quick-lock' micro adjustable rip fence
- Blade tracking window





Heavy-duty cast

iron mitre fence

and fall

Micro fence adjustment



Auxiliary fence for cutting thinner materials

NVR SWITCH

OPTIONAL

WHEEL KIT

01444 Motor 2 HP (1.5 kW) Supply 230 V (13 A) pat Size 406 mm Throat Size 535 x 435 mm 0° to 45° Table Size Table Tilt 1010 mm Table Height 235 mm 2750 mm Maximum Cutting Height S Blade Length PECIFICATION Blade Width 6 to 25 mm 480 m/min 840 m/min Speeds Weight 108 kg 1510 x 575 x 440 mm (Box 1) 260 x 650 x 480 mm (Box 2) Packaged Dimensions Barcode Number 5012713014446 OPTIONAL ACCESSORIES Wheel Kit 06920 S

Barcode Number 5012713069200

SIP 16" Professional Bandsaw ITEM NO: 01445

This saw has a powerful 3hp motor and large diameter wheels to make it ideal for busy woodworking shops - professional or serious amateur. The machine has dual speeds for cutting all types of wood, plastic and non-ferrous metal. Fully adjustable blade tensioning and tracking ensure a precise and friction free cutting action.

Key Features:

- Supplied with: 12mm Blade
- · Cast mitre guide and 'quick-lock' micro adjustable rip fence
- · Robust cast iron table for a sturdy machine
- · Powerful dust extraction
- · Rack and pinion rise and fall ball-bearing guides
- Blade tracking window

SPECIFICATIONS

MODEL	SIP 16" BANDSAW
PRODUCT CODE	01445
Motor	3 HP (2.2 kW)
Supply	230 V (13 A)
Throat Size	405 mm
Table Size	535 x 435 mm
Table Tilt	0° to 45°
Table Height	900 mm
Maximum Cutting Height	254 mm
Blade Length	3345 mm
Blade Width	10 to 25 mm
Speeds	420 m/min 840 m/min
Weight	126 kg
Packaged Dimensions	1900 x 520 x 710 mm
Barcode Number	5012713014453
OPTIONAL ACCESSORIES	
Wheel Kit	06920
Barcode Number	5012713069200



Quick release blade tension



Rack and pinion 45° table tilt



Rack and pinion

rise and fall

Auxiliary fence for cutting thinner materials



BANDSAWS

- 45 0

Table Till

PLANERS / THICKNESSERS

SIP 6" Planer ITEM NO: 01543

This machine has a powerful 1100w motor and a cutter block speed of 10,000rpm for a superb finish. The 6" planer is a robust yet compact machine equally at home in a woodwork shop or with the DIY enthusiast working in limited space. The planer has built-in dust extraction and collection, meaning there is no need to connect an external dust extractor.

Key Features:

- Rigid extruded fence with adjustable stops which can be tilted to 90° or 45°
- Adjustable cutting depth maximum cutting depth of 2mm



SIP 8"x 8" Planer/Thicknesser ITEM NO: 01552

The SIP 8" x 8" Planer/Thicknesser has cast aluminium, machine-surfaced table tops for accurate planing of long lengths of timber. The thicknesser has power feed rollers which provide a consistently smooth finish. The machine has built in dust extraction and collection, therefore no requirement to attach an external dust extractor

Key Features:

You Tube

- Adjustable 0° to 45° surface planing fence
- · Ideal for square/chamfered planing
- Strong extruded alloy construction
- Built-in safety interlocks



Easily converted to thicknesser mode

	SIP 8"x 6" PLANER/THICKNESSER 01552	
	1.5 HP (1.1 kW)	
LISA: THY Mana Supply Supply	230 V (13 A)	
Search: Maximum Working Width	204 mm	
SipTechZone Maximum Planing Depth	2 mm	S
Thicknesser Height Capacity	6 to 210 mm	D
Cutter Block Knives	2	Ē
NVR Cutter Block Speed	8500 rpm	0
	7 m/min	
SWITCH Maximum Feree Title	90° to 135°	
Overall Table Length	740 mm	0
Thicknesser Bed Length	280 mm	\rightarrow
Planer Table Height	440 mm	
BUILT-IN DUST	32 kg	0
EXTRACTION Packaged Dimensions	820 x 540 x 560 mm	Z
Barcode Number	5012713015528	S

SPINDLE MOULDER

SIP Professional Spindle Moulder ITEM NO: 01456

This machine is designed to cope with a wide range of woodworking tasks. It features a large cast iron table with a tilting spindle for greater flexibility, 4 spindle speeds and a heavy-duty fence and clamping system - ideal for intricate workpieces and resulting in safer operation.

Key Features:

You Tube 同望

Search SipTechZone

NVR SWITCH

- · Table pre-drilled to accept power feed unit
- · Low speed for use with the sanding bobbin included

2 YEAR

WARRANTY

NOTE: Spindle Moulder shown with optional Sliding Carriage (01457) - not included

· Confortable 900mm working table height





Spindle tilt from -10° to +30°





Sanding bobbin included

SIP Sliding Carriage for Spindle Moulder ITEM NO: 01457

An optional sliding carriage and large sliding table (500 x 480mm) to make the SIP Spindle Moulder even more versatile. Ball bearing sliding table movement. The sliding table has a high quality adjustable mitre and cross fence with built in work clamp.







Clamping device

Independently micro-adjustable outfeed fence

SIP PROFESSIONAL SPINDLE MOULDER
01456
3.75 HP (2.8 kW)
230 V (16 A)
710 x 640 mm
200 mm
1800 / 3000 / 6000 / 9000 rpm
30 mm
200 mm
100 mm
-10° to +30°
170 kg
760 x 690 x 700 mm
5012713014569
01947 A / B
14 kg (A) / 20 kg (B)
1220 x 308 x 110 mm (A) 525 x 505 x 325 mm (B)
5012713019476

SPINDLE

WOOD LATHES

SIP Variable Speed Midi Wood Lathe ITEM NO: 01936

The powerful 0.75hp motor in this compact lathe ensures long lasting, smooth performance. The lathe comprises a robust heavy-duty cast iron lathe bed, headstock and tailstock. Full electronic variable speed control delivers speeds of 500 to 3500rpm with a digital display read-out.

Key Features:

- · Thermal cut-off switch
- Digital display speed read-out
- · Robust heavy-duty cast iron lathe bed, headstock and tailstock - professional and durable
- Electronic variable speed

MODEL		SIP VARIABLE SPEED MIDI WOOD LATHE	
	PRODUCT CODE	01936	
	Motor	0.75 HP (550 W)	S
	Supply	230 V (13 A)	Ū
	Speed Range	500 to 3500 rpm	
	Headstock Taper	MT1	0
	Tailstock Taper	MT1	_
	Spindle Thread	3/4" x 16 TPI	
	Distance Between Centres	432 mm (17")	0
	Turning Capacity Diameter	305 mm (12")	
	Overall Length	950	
	Weight	38 kg	0
	Packaged Dimensions	840 x 460 x 300 mm	CIFICATIONS
	Barcode Number	5012713015436	S



SIP 12" x 36" Swivel Head Wood Lathe ITEM NO: 01938

The powerful 0.75hp motor in this lathe ensures long-lasting, smooth performance. It has 10 speeds for maximum flexibility and features easy speed change and digital read-out for accurate speed display. Fitted with a hollow tailstock suitable for long hole boring.

Supplied with sturdy steel stand, faceplate, drive and live tailstock centres, 2 tool rests and bowl turning rest holder.

Key Features:

- · Robust heavy-duty cast iron lathe bed, headstock and tailstock professional and durable
- 360° swivel headstock allows outboard turning of larger material, with 4 position lock
- · Easy speed change
- · Lockable tailstock with fine adjustment for accurate setting
- Digital readout for accurate speed display

MODEL	SIP 12" x 36" SWIVEL HEAD WOOD LATHE		
PRODUCT CODE	01938		
Motor	0.75 HP (550 W)	S	
Supply	230 V (13 A)	D	
Speed Range	500 to 2000 rpm	Ē	
Headstock Taper	MT1	0	
Tailstock Taper	MT2		
Spindle Thread	3/4" x 16 TPI		
Distance Between Centres	900 mm (36")	0	
Turning Capacity Diameter	300 mm (12")	\rightarrow	
Overall Length	1300 mm		
Weight	80 kg	0	
Packaged Dimensions	1380 x 350 x 370 mm	ATION	
Barcode Number	5012713019380	0	

SIP 6 Piece Chisel Set ITEM NO: 01951

This set of HSS chisels is an ideal starter set for people wanting to turn end-mounted items such as bowls, platters or goblets as well as spindles. It contains all the essential tools to get you started. The set is supplied in an attractive wooden presentation box and comprises:

NVR SWITCH

- 1x 10mm spindle gouge,
- 1x 5mm parting tool, 1x 20mm round nose scraper, •
- .
- 1x 30mm oval screw chisel, 1x 25mm roughing out gouge,
- 1x 10mm bowl gouge.

Barcode Number:

5012713068579



Set is supplied with a wooden presentation/storage box

WOOD LATHES

SIP 14" x 43" Cast Iron Wood Lathe ITEM NO: 01940

A serious lathe ideal for heavy-duty woodturning. The 1hp induction motor delivers lots of power quietly and efficiently with 10 variable speeds from 500 to 2200rpm and a digital readout speed display. The lathe is supplied complete with a cast iron leg stand for a solid, robust base and heavy-duty cast iron head and tailstocks.

Supplied with faceplate, drive and live tailstock centre, 2 tool rests and bowl turning rest holder

Key Features:

NVR

SWITCH

- Hollow tailstock for long hole boring
- Rotating headstock for larger bowls
- Headstock will move along the bed to centralise heavy bowl turning
- Digital readout for accurate speed display



MODEL	SIP 14"x 43" CAST IRON WOOD LATHE
PRODUCT CODE	01940
Motor	1 HP (750 W)
Supply	230 V (13 A)
Speed Range	500 to 2200 rpm
Headstock Taper	MT1
Tailstock Taper	MT2
Spindle Thread	3/4" x 16 TPI
Distance Between Centres	1100 mm (43")
Turning Capacity Diameter	350 mm (14")
Overall Length	1500 mm
Weight	130 kg
Packaged Dimensions	1600 x 400 x 430 mm
Barcode Number	5012713019403



SIP Outboard Turning Attachment ITEM NO: 01951

Extends bowl turning capacity. This outboard turning attachment is made of cast iron, is easy to position and control and mounts directly on the cast iron stand of the lathe.

For use with 01940 wood lathe. Barcode Number: 5012713019519



SIP Woodturning Chuck Set ITEM NO: 06851

The woodturning chuck set is a fully functioning 54mm diameter, 4 jaw self-centering chuck complete with interchangeable jaw sets and a screw chuck.

This is an essential holding device for anyone involved in miniature woodturning. Beautifully engineered and supplied in a fitted case - this set offers superb value for money.

Barcode Number: 5012713068517



SIP 4" Chuck ITEM NO: 06853

The 4" self-centering chuck is ideal for bowls and unsupported spigot turning work. Supplied with a woodscrew chuck attachment for securing smaller workpieces. The 4" chuck is precision engineered and a joy to use.

This is a great package offering excellent value to all woodturners.

Barcode Number: 5012713068531



MORTICERS

SIP Bench Morticer ITEM NO: 01942

This bench morticer gives extremely high levels of accuracy, holding the workpieces securely via the heavy-duty solid clamp during operation. Durable cast iron construction.

Key Features:

MORTICERS

- · Heavy-duty clamp to secure work
- Doubles as a reliable bench drill
- · Premium cast iron construction
- · Integrated NVR switch

	NVR SWITCH
MODEL	SIP BENCH MORTICER
PRODUCT CODE	01942
Motor	0.5 HP (370 W)
Supply	230 V (13 A)
Morticing Capacity	6 to 12 mm (1/2" to 1/4")
Maximum Chisel Stroke	76 mm 🗖
Maximum Chisel to Table	65 mm 🔿
Drill Chuck Capacity	13 mm
Standard Bush Size	3/4" (19.05 mm)
Spindle Speed	1400 rpm
Work Table Size	65 mm CI 13 mm 13/4" (19.05 mm) 3/4" (19.05 mm) CI 1400 rpm CI 340 x 150 mm CI 32 kg 370 x 260 x 560 mm
Overall Height	780 mm 📃
Weight	32 kg O
Packaged Dimensions	370 x 260 x 560 mm Z
Barcode Number	5012713019427 ()

SIP Bench Morticer with Sliding Table ITEM NO: 01944

A compact bench-mounted morticer giving high levels of accuracy and ease-of-use with industrial features at an affordable price. An important feature of this machine is the heavy and solid clamp, which holds workpieces securely, ensuring no movement during operation. Fully adjustable gib strips make sure accuracy is maintained.

Key Features:

- · Solid cast iron table and work clamp
- · Adjustable gib strips for superior accuracy
- · Gas strut gives smooth action
- · Vertical and sideways movement stops



MODEL	SIP BENCH MORTICER WITH SLIDING TABLE	
PRODUCT CODE	01944	
Motor	0.5 HP (370 W)	
Supply	230 V (13 A)	
Morticing Capacity	6 to 16 mm (1/2" to 5/8")	
Maximum Chisel Stroke	130 mm	S
Maximum Chisel to Table	100 mm	D
Maximum Clamping Width	80 mm	Ē
Drill Chuck Capacity	13 mm	0
Standard Bush Size	19.05 mm (3/4")	CIFICATION
Spindle Speed	1400 rpm	
Work Table Size	180 x 157 mm	_ <u>0</u>
Base Size	320 x 270 mm	$\neg P$
Overall Height	800 mm	
Weight	46 kg	0
Packaged Dimensions	340 x 450 x 670 mm	Z
Barcode Number	5012713019441	S



The repositional cast iron clamp provides a solid hold for a wide range of workpiece sizes



Aluminium motor housing for improved heat dissipation



MORTICERS

SIP Heavy-Duty Morticer with Cabinet ITEM NO: 01950

A heavy-duty cast iron morticer on a cabinet stand with a maximum capacity of 25mm. The head moves smoothly on a solid rack and dovetail column, with gib strips that can be easily adjusted for accuracy and smoothness in use. Work is held securely in a quick-lock clamp and the powerful 1hp induction motor provides ample power for all applications.

The rise and fall handle is positionable for maximum leverage.

Key Features:

- · Solid cast iron table and work clamp
- Ratchet rise and fall handle
- Adjustable gib strips for accuracy
- · Cabinet stand included
- · Vertical and sideways movement stops



Solid cast iron table with wood top and cast iron clamp, slides into position quickly and easily



Sturdy steel and shelved cabinet stand included



Multi-height, depth table adjustment



```
3 Piece Chisel Set (6, 10, 12 mm)
4 Piece Chisel Set (6, 10, 12, 16 mm
```

MODEL	SIP HEAVY-DUTY MORTIC WITH CABINET
PRODUCT CODE	01950
Motor	1 HP (750 W)
Supply	230 V (13 A)
Morticing Capacity	6 to 26 mm (1/2" to 1")
Maximum Chisel Stroke	210 mm
Maximum Chisel to Table	140 mm
Maximum Clamping Width	70 mm
Drill Chuck Capacity	16 mm
Standard Bush Size	19.05 mm
Spindle Speed	1400 rpm
Work Table Size	400 x 150 mm
Overall Height	1720 mm
Weight	119 kg
Packaged Dimensions	460 x 400 x 1500 mm
Barcode Number	5012713019502





for improved heat

dissipation

Rise and fall handle features a ratchet mechanism to give optimum leverage



NVR SWITCH

SANDERS

SIP 12" Disc Sander ITEM NO: 01953

Ideal for the user who requires a well-built, powerful and dedicated disc sander. Featuring a cast iron body and machined cast iron tilting table. The powerful 1hp motor provides plenty of power and torque to easily handle large sections of timber. This machine offers unrivalled value-for-money for the end user.

Key Features:

- · Cast iron machined tilting table with T-slot
- · Cast alloy mitre fence
- · Fitted with anti-vibration feet
- · Fitted dust extraction port
- Integral brake

SANDERS

Dynamically balanced





Cast alloy mitre fence

Cast iron machined tilting table with T-Slot

You Tube

Search: SipTechZo

FITTED WITH DUST EXTRACTION PORT

MODEL	SIP 12" DISC SANDER	D
PRODUCT CODE	01953	Ē
Motor	0.75 HP (550 W)	CIFIC
Supply	230 V (13 A)	Ŧ
Table Size	440 x 150 mm	<u> </u>
Table Tilt	0° to 45°	0
Sanding Disc Size	305 mm (12")	
Sanding Disc Speed	1400 rpm	ATIO
Weight	34 kg	
Packaged Dimensions	460 x 430 x 430 mm	Z
Barcode Number	5012713019533	S

SIP 4" x 8" Belt & Disc Sander ITEM NO: 01946

The powerful 500w (0.75hp) motor handles most sanding jobs on hard and soft woods* and the optimal belt and disc speeds ensure maximum efficiency. Large capacity 8" sanding disc.

ഗ

Key Features:

• Two large cast alloy adjustable sanding tables and one mitre guide for increased accuracy

SPECIFICATIONS

- Adjustable 0° to 90° belt table tilt for horizontal or vertical use
- Adjustable 0° to 45° disc table tilt
- · Easy to use belt tension control lever for fast belt changes
- Built-in dust collection



MODEL	SIP 4" x 8" BELT/DISC SANDER
PRODUCT CODE	01946
Motor	0.75 HP (550 W)
Supply	230 V (13 A)
Sanding Belt Size	102 x 914 mm
Sanding Belt Tilt	0° to 90°
Sanding Belt Speed	550 m/min
Sanding Disc Size	203 mm (8")
Sanding Disc Tilt	0° to 45°
Sanding Disc Speed	2850 rpm
Weight	26 kg
Packaged Dimensions	590 x 350 x 380 mm
Barcode Number	5012713014965

Sale

SANDERS

SIP 6" x 10" Belt & Disc Sander ITEM NO: 01943

The SIP Belt/Disc Sander is a powerful combination sander that will satisfy even the most demanding user - there are very few sanding jobs that it is unable to tackle!

The tilting table is made from cast iron with a smooth finished surface. Supplied with cast mitre for optimum accuracy.

Key Features:

- · Cast iron machined tilting table
- · Cast mitre fence
- · Includes floor stand
- · Belt sander can be positioned upright to allow sanding of large end grain pieces of timber

0° to 90° belt tilt



Cast-iron machined tilting table with cast mitre fence

SANDERS



Don't forget ACCESSORIES & CONSUMABLES See page 32

x 10" BELT & DISC SA

You Tube

NVR SWITCH

MODEL

 MODEL
 SIP 6** 10* BEL

 PRODUCT CODE
 01943

 Motor
 1 HP (800 W)

 Supply
 230 V (13 A)

 Sanding Belt Size
 150 x 1220 mm

 Sanding Belt Tilt
 0° to 90°

 Sanding Belt Size
 500 m/min

 Sanding Disc Size
 254 mm (10")

 Sanding Disc Size
 1400 rm

Sanding Disc Speed 1400 rpm Weight 53 kg Packaged Dimensions 720 x 410 x 440 mm Barcode Number 5012713019434

Search: SipTechZone

ROUTER / BISCUIT JOINTER

SIP 1500 W Router ITEM NO: 01478

This machine has a powerful 1500w 2.0hp motor with variable speeds 6000 to 22,000 rpm.

This is a sturdy machine designed for hard work.

Key Features:

- · Supplied in heavy-duty carry case
- Micro adjustable depth stop
- 4 pre-set stops
- Dust extraction outlet

Set includes:

ROUTER § IOINTER

- Dust extraction port
- Parallel fence guide
- 1/4", 3/8", 1/2" collets
- Trammel guide
- Allen key
- 6x popular TCT router bits including rounding over, dovetailing and fluted bit

		σ
MODEL	SIP 1500W ROUTER	Ē
PRODUCT CODE	01478	0
Motor	2 HP (1500 W)	Ξ
Supply	230 V (13 A)	<u> </u>
Minimum Speed	6,000 rpm	Ω
Maximum Speed	22000 rpm	ATION
Maximum Plunge Depth	50 mm	
Weight	3.5 kg	0
Packaged Dimensions	400 x 355 x 300 mm	Z
Barcode Number	5012713014781	S



moulded carry case

ഗ

SIP Biscuit Jointer ITEM NO: 07904

Designed for precision woodworking and furniture making. Fitted with an extra powerful 800w motor, it is ideal for joining wood at any angle. The Biscuit Jointer is fitted with a TCT blade, dust extraction port and dust bag.

Parallel guide fence

Key Features:

- Adjustable tilt fence 0° to 90° for angled biscuit insertion and joints
- Depth adjustment for standard (00, 10, 20) biscuit sizes
- · Complete in a blow moulded case
- Fine adjustment facility
- Plastic guard protects workpiece surface during use



You Tube

SinTechZon

Sik

500w

oute

Protective plastic workpiece guard

		SP
MODEL	SIP BISCUIT JOINTER	m
PRODUCT CODE	07904	0
Motor	1.2 HP (900 W)	
Supply	230 V (13 A)	
Maximum Cut Depth	30 mm	- <u> </u>
Depth Adjustment	00, 10, 20 (standard biscuits)	ATIO
Fence Tilt	0° to 90°	
Weight	4.5 kg	0
Packaged Dimensions	400 x 220 x 180 mm	Z
Barcode Number	5012713079049	S

PINDUST

DUST COLLECTORS

SIP 50 Litre Dust & Chip Collector ITEM NO: 01923

The 50 litre capacity is ideal for small workshops using bench top machinery and power tools. Because these types of machine generate a high speed of air through the hose, they are suitable for reducing down to a smaller diameter hose when using power tools. Built to high standards and offers effective and high filtration to 0.5 microns.

You Tube

Search: SipTechZor

> 5 PIECE DUST COLLECTOR ADAPTOR SET INCLUDED

A quick action clamp releases the lid of the drum to empty it out.

Key Features:

- 1.5 metre hose
- 5 Piece Adaptor (01935) included



Quick action clamp for easy lid removal



Filter bag for clean, quick emptying

MODEL	SIP 50 LITRE DUST & CHIP COLLECTOR	
PRODUCT CODE	01923	
Motor	1.6 HP (1200 W)	
Supply	230 V (13 A)	
Motor Speed	30,000 rpm	
Collection Capacity	50 litres	
Air Flow	2.4 m ³ /min	
Filtration	0.5 microns	
Hose Length	1.8 metres	
Inlet Hose Diameter	100 mm	
Weight	9.5 kg	
Packaged Dimensions	645 x 430 x 430 mm	
Barcode Number	5012713019236	

SIP 5 Piece Dust Collector Adaptor Set ITEM NO: 01935

Adapts 100mm to: 105mm, 70mm, 45mm, 40mm and 35mm.

Compatible with the full range of SIP Dust Collectors and Extractors.

SIP 1 HP Dust Collector ITEM NO: 01932

This powerful machine removes dust and wood chippings from busy woodwork shops. The 1hp induction motor gives smooth, long-lasting performance and the balanced impeller is extremely quiet and impact resistant. Ideal for use with planer/thicknessers and saws.

Key Features:

- Quick release bag clamps
- · Wheel mounted for ease of movement
- · Easy to assemble
- Quiet 1hp induction motor
- Connection hose included



MODEL	SIP 1 HP DUST COLLECTOR	
PRODUCT CODE	01932	S
Motor	1 HP (750 W)	D
Supply	230 V (13 A)	Ē
Bag Capacity	65 litres	C
Air Flow	1150 m ³ /hr	Π
Fan Diameter	295 mm	0
Connection Hose Length	2.2 metres	0
Inlet Hose Diameter	100 mm	P_{-}
Inlet Adaptor	×	ATIO
Weight	25 kg	0
Packaged Dimensions	890 x 540 x 380 mm	Z
Barcode Number	5012713013928	S

SIP 1 HP Dust Collector with Vacuum Attachment ITEM NO: 01952

This powerful machine removes dust and wood chippings from busy woodwork shops. The 1hp induction motor gives smooth, long-lasting performance and the balanced impeller is extremely quiet and impact resistant. Supplied with detachable floor cleaning attachment.

Included: 4" flexible cleaning attachment hose, 5 micron filter bag included

Key Features:

- · Very sturdy steel construction
- · Mounted on free running castors for improved manoeuvrability
- · Removable floor cleaning vacuum attachment
- Quiet 1hp induction motor
- Connection hose included





INDUSTRIA

Floor cleaning attachment for collection of saw dust and wood chippings from workshop floor

MODEL	SIP 1 HP DUST COLLECTOR WITH VACUUM ATTACHMENT	C.
PRODUCT CODE	01952	τ
Motor	1 HP (750 W)	Г
Supply	230 V (13 A)	C
Bag Capacity	65 litres	=
Air Flow	849 m³/hr	
Fan Diameter	230 mm	- C
Inlet Hose Diameter	100 mm	A
Inlet Adaptor	x	=
Weight	30 kg	C
Packaged Dimensions	760 x 450 x 450 mm	Z
Barcode Number	5012713019526	()

SIP 3 HP Two Bag Dust Collector ITEM NO: 01954

This extractor has dual input capable of running two woodworking machines simultaneously. The powerful 3hp induction motor will give long-running, smooth performance and the balanced metal impeller is quiet and has high impact resistance.

2x cotton bags (for coarse chippings), 1x double inlet adaptor included

Key Features:

- Filtration down to 1 micron*
- · Mounted on free running castors for improved manoeuvrability
- Quick release straps
- Inlet blanking adaptors supplied
- · Connection hose not included





Twin dust input facility gives the option of running two machines with one extractor

MODEL	SIP 3 HP TWO BAG DUST COLLECTOR
PRODUCT CODE	01954
Motor	3 HP (2.2 kW)
Supply	230 V (13 A)
Bag Capacity	153 litres
Air Flow	2526 m³/hr
Fan Diameter	300 mm
Inlet Hose Diameter	1x 150 / 2x 100 mm
Inlet Adaptor	×
Weight	47 kg
Packaged Dimensions	910 x 570 x 590 mm
Barcode Number	5012713019540
	PRODUCT CODE Motor Supply Bag Capacity Air Flow Fan Diameter Inlet Hose Diameter Inlet Adaptor Weight Packaged Dimensions

Don't forget ACCESSORIES & CONSUMABLES See page 28

SIP 3 HP Four Bag Dust Collector ITEM NO: 01956

A powerful machine for a busy workshop. A triple hose inlet facility gives the option of running up to 3 machines simultaneously. The powerful induction 2237w (3hp) motor provides long running, smooth performance and the balanced metal impeller has high impact resistance.

Inlets can be closed off when not in use.

Key Features:

- · Complete with a set of collection bags and free-running castors
- Inlet adaptor for 3 machines
- Inlet blanking adaptors are supplied
- · Connection hose not included





Triple dust input facility gives the option of running three machines with one extractor

MODEL	SIP 3 HP FOUR BAG DUST COLLECTOR	U
PRODUCT CODE	01956	τ
Motor	3 HP (2.2 kW)	
Supply	230 V (13 A)	C
Bag Capacity	2x 153 litres	=
Air Flow	3900 m³/hr	<u> </u>
Fan Diameter	305 mm	C.
Inlet Hose Diameter	1x 150 / 3x 100 mm	\supset
Inlet Adaptor	×	CIFICATIO
Weight	59 kg	C
Packaged Dimensions	1170 x 560 x 570 mm	Z
Barcode Number	5012713019564	C

SAW STAND & WORKBENCH

SIP Universal Saw Stand ITEM NO: 01958 This is a solidly built, fully adjustable universal stand. It is easily assembled and folds neatly away for easy and compact storage. The stand includes a wheel kit for easy manoeuvrability. Height adjustable Quick release SIP universal stands are compatible with most end rollers mounting brackets makes of compound and table saws. **Key Features:** Two adjustable roller supports for precision adjustment of workpiece height 2 x quick release mounting rails Tubular steel extendable sliding rails · Legs fold away for compact storage · Includes a wheel kit for easy manoeuvrability 1220 - 1900mm extendable rails ഗ Angle adjustable 1220 - 1900mm PECIFICATIONS end rollers extendable rails SIP UNIVERSAL SAW S PRODUCT CODE 01958 Table Height 800 mm Maximum Work Support Height 320 mm Table Rail Adjustment 1220 to 1900 mm Weight 26 kg Packaged Dimensions 190 x 300 x 1330 mm Barcode Number 5012713019588 Folds flat for easy storage SIP Oak Woodworking Bench ITEM NO: 01441

A modern version of a traditional woodworking bench. This bench is constructed from quality oak - much harder wearing than standard softwood benches. Environmentally friendly, manufactured from 100% sustainable forests.

Key Features:

- Bench incorporates 2 oak vices
- Supplied with 4 workpiece holding pegs
- Single central, waist level drawer for convenient tool storage
- Low level, full length storage shelf for bulkier items



Waist height drawer



in

2 oak vices

MODEL	SIP OAK WOODWORKING BENCH
PRODUCT CODE	
Working Area	1350 x 500 mm
Work Top Height	865 mm
Vice Opening	160 mm
Vice Width	280 mm
Weight	30 kg
Packaged Dimensions	1350 x 500 x 825 mm
Barcode Number	5012713014415



Sip



Workpiece holding pegs

Convenient storage shelf

ROLLER STANDS

SIP Single Roller Stand ITEM NO: 01379

A fully adjustable roller stand with an 80kg load capacity. An essential piece of equipment when handling large workpieces in productive and busy workshops.

Key Features:

· Ideal for workshops and home use

 PRODUCT CODE
 01379

 Load Capacity
 80 kg

 Height Adjustment Range
 700 to 1100 mm

 Roller Length
 400 mm

 No. of Rollers
 1

 Rollers Diameter
 50 mm

 Weight
 6.5 kg

 Packaged Dimensions
 600 x 160 x 130 mm

 Barcode Number
 5012713013791

- Lightweight weighs just 6.5kg!
- Ideal for SIP wood machines

4.0	
SPEC	Maximum Roller Length 400mm
C A	+
_ A	0 0
SNOI	
S	

SIP Adjustable V-Type Roller Ball Stand ITEM NO: 01383

This adjustable 'V' roller stand features 2 fully adjustable roller arms that tilt independently and lock between 0° and 45°. 4 rollers on each arm are suitable for flat and cylindrical wood.

Key Features:

- Ideal for supporting irregular timber
- · Suitable for flat and cylindrical wood
- Super lightweight weighs 8kg!



MODEL	SIP V-TYPE ROLLER BALL STAND	
PRODUCT CODE	01383	
Load Capacity	100 kg	
Height Adjustment Range	700 to 1100 mm	
Roller Length	450 mm	
No. of Rollers	8 Roller Balls	
Roller Arm Tilt	0° to 45°	
Weight	8 kg	
Packaged Dimensions	480 x 440 x 135 mm	
Barcode Number	5012713013838	



SIP Heavy Duty 5 Roller Stand ITEM NO: 01381

A heavy-duty 5 roller stand features a cast iron base with four feet for maximum stability and spreading weight, when dealing with large and heavy workpieces whilst machining.

Key Features:

· Ideal for large and heavy timber support

MODE	L SIP HEAVY DUTY 5 ROLLER STAND	
PRODUCT COD	E 01381	
Load Capacit	y 100 kg	
Height Adjustment Rang	e 680 to 1150 mm	
Roller Lengt	h 450 mm	
No. of Roller	rs 5	
Rollers Diamete	er 57 mm	
Weigh	nt 16 kg	
Packaged Dimension	s 590 x 550 x 135 mm	
Barcode Numbe	er 5012713013814	









SAW HORSES

SIP Saw Log Horse ITEM NO: 01973

The saw horse can keep logs steady during cutting. A solid construction allows for heavy-duty use, and the ability to support logs up to 150kg, and can also fold away for easy storage.

Key Features:

- Easy fold flat design for storage
- Holds log securely for 1-man use
- Solid and durable construction



Folds flat for convenient storage

MODEL	SIP SAW HORSE	
PRODUCT CODE	01973	
Maximum Log Weight	150 kg	
Maximum Log Diameter	300 mm	
Weight	7.7 kg	
Packaged Dimensions	40 x 1005 x 165 mm	
Barcode Number	5012713019731	

SIP Chainsaw Log Horse ITEM NO: 01979

This SIP chainsaw log horse is compatible with most electric and petrol-driven chainsaws, and supports both the chainsaw and logs of varying sizes at a comfortable height.

SPE

SPECIFICATIONS

Key Features:

- · Comfortable user operating height
- Suitable for most chainsaw brands
- Integrated chain guard for safety
- Built from hard-wearing steel
- Lightweight only 11.1kg!
- · Folds flat for easy storage



MODEL	SIP CHAINSAW HORSE
PRODUCT CODE	01979
Maximum Log Weight	120 kg
Maximum Log Length	1800 mm
Maximum Log Diameter	200 mm
Chain Bar Length	450 mm
Working Dimensions	1280 x 750 x 90 mm
Weight	7.7 kg
Packaged Dimensions	910 x 254 x 86 mm
Barcode Number	5012713019793

LOG SPLITTERS

SIP 5 Ton Horizontal Electric Log Splitter with Stand ITEM NO: 01967

The hydraulic 5 Ton Log Splitter effortlessly cuts and splits logs, due in part to the cutting wedge returning to the starting position after a split, allowing you to match the log height comfortably.

Key Features:

- Extra-large wheels for movement
- 2-hand operation for added safety
- Cutting wedge returns to position
- The wedge matches the log height
- Integrated ram lock and handle
- Hydraulically-operated ram





Large wheels for easy transport

MODEL	SIP 5 TON LOG SPLITTER	Ē
PRODUCT CODE	01967	0
Motor	3 HP (2.2 kW)	Ŧ
Supply	230 V (13 A)	IFIC
Splitting Force	5 Tons	
Log Diameter	50 to 250 mm	ATI
Maximum Log Length	520 mm	
Weight	44.5 kg	0
Packaged Dimensions	940 x 270 x 510 mm	Z
Barcode Number	5012713019670	S

Stand raises the splitter to a workable height when a bench is not available



LOG SPLITTERS

SIP 7 Ton Vertical Electric Log Splitter ITEM NO: 01977

The 7 Ton Vertical Log Splitter can effortlessly split logs whilst maintaining safety. The cutting wedge is designed to return to the starting position, matching log height for maximum efficiency.

Key Features:

- Two-handed operation for safety
- · Large wheels for unit movement
- Adjustable cutting wedge return
- Integrated handle and ram lock
- Ram is hydraulically-operated



13



DUST COLLECTORS

NVR switch for added safety



large wheels for easy transport



Powerful 3kW (4hp) motor

MODEL	SIP 7 TON VERTICAL LOG SPLITTEF
PRODUCT CODE	01977
Motor	4 HP (3 kW)
Supply	230 V (13 A)
Splitting Force	7 Tons
Log Diameter	120 to 3230 mm
Maximum Log Length	1040 mm
Weight	115 kg
Packaged Dimensions	930 x 830 x 1470 mm
Barcode Number	5012713019779









SIP Wheel Kit			
SIP Code	DESCRIPTION	Suitable for SIP Collector*	Barcode Number
06920 Optional Wheel Kit 01332, 01444, 01445, 5012713069200			
*may be used with non-SIP equinment - please check your user manual			

SIP Saw Stand Accessories				
SIP Code	DESCRIPTION	Suitable for SIP Collector*	Barcode Number	
01957	Quick Release Mounting Rails - Supplied as a pair	01958	5012713019571	

All blades and consumables supplied by SIP have been specially selected and rigorously tested to ensure they provide optimum performance when used with SIP equipment.




10" (254 mm) TCT Blades



TUNGSTEN CARBIDE TIPPED (TCT) BLADES

There are numerous variations of TCT Blades but they all have five common features, each having its own effect on the overall suitability performance of the blade to the task in hand.

- (1) Saw Teeth: Profile, alternation, hook and clearance angles all determine the type of cut achieved.
- (2) Circular Plate: The plate thickness and diameter ensure suitability (2) Circular Plate: These are the "response" between the testh which help
- (3) Gullets: These are the "recesses" between the teeth which help to clear away sawdust and wood chips from the cut.
- (4) Expansion Slots: These may or may not be featured. The purpose of these cuts is to allow some expansion when the blade heats up during cutting. This prevents any distortion to the cut itself, but more importantly protects the saw blade from warping, rendering it unusable.
- (5) Arbor Hole: This must be correct to allow precise fitting of blade to the table saw arbor.

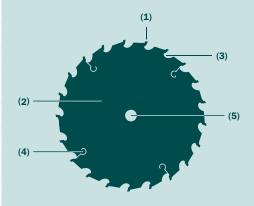

TCT BLADE TYPES

TCT Blades fall into three categories each designed for certain styles of cut.

RIP BLADES: Rip blades have a large hook angle (usually 20° to 25°). The bigger hook ensuring an easier cut with the grain. This enables the blade to remove wood with each pass. In comparison to others rip blades tend to have fewer teeth with larger gullets to help with a cleaner cut.

CROSS CUT BLADES: Cross cut blades or Cut-Off blades as they are also known have a smaller hook angle (typically 5° to 10°). As it is a lot harder to cut across the grain this blade has a less wood removal with each pass. This in turn allows the gullets to be a lot smaller in size therefore leaving room for a greater number of teeth.

GENERAL PURPOSE BLADES: As the name suggests these are merely a combination of the above two blades. The design is more of a compromise between the two allowing the blade to adequately perform both rip cuts, and cross cuts.

CIRCULAR SAW TEETH

Are ground and sharpened at a specific angle (called the hook angle). The teeth are arranged in such a way that cut or kerf will be wider than the main thickness (the plate) of the blade. This effectively prevents the plate from rubbing in the cut .

On carbide-tipped blades however, the saw teeth are ground slightly wider than the plate and then brazed into position. This again gives the necessary clearance to avoid rubbing.

The cutting edge of each tooth is ground to a specific profile, this determines the cutting action. There are four common profiles - Flat, Bevel, Steep Bevel or Triple-Chip.



SIP Code	DESCRIPTION	Cut Type	Suitable for SIP Saws*	Barcode Numbe		
10" (254 MM) BLADES						
06128	254 x 30 mm 40 Teeth	General Purpose	01930	5012713		
06184	254 x 25.4 mm 40 Teeth	General Purpose	01332	5012713		
12" (315 MM) BLADES						
06156	315 x 30 mm 30 Teeth	Ripping	01504, 01446	5012713		
06158	315 x 30 mm 40 Teeth	General Purpose	01504, 01446	5012713		
06160	315 x 30 mm 60 Teeth	Fine	01504, 01446	5012713		

All blades and consumables supplied by SIP have been specially selected and rigorously tested to ensure they provide optimum performance when used with SIP equipment.



SIP Bandsaw Blades						
SIP Code	DESCRIPTION	Cut Type	Suitable for SIP Saws*	Barcode Num		
14" (254 MM)						
01318	1490 x 10 x 0.65 mm 6TPI	Regular	01444	5012713013		
01322	1490 x 10 x 0.65 mm 6TPI	Coarse	01444	50127130133		
14" (254 MM) HEAVY DUTY						
06925	2750 x 6 x 0.25 mm 6TPI	Regular	01444	50127130692		
06930	2750 x 12 x 0.65 mm 6TPI	Regular	01444	50127130693		
06931	2750 x 25 x 0.9 mm 4TPI	Coarse	01444	50127130693		
09430	3345 x 20 x 20 mm 6TPI	Regular	01444	50127130943		
16" (405 MM)						
09430	3345 x 25 x 0.9 mm 6TPI	Regular	01445	50127130943		
06933	3345 x 25 x 0.9 mm 4TPI	Coarse	01445	50127130693		



BANDSAW BLADES

These blades have precision engineered teeth which are milled, set and hardened into a flexible backing strip ensuring long cutting life on wood, plastics and non-ferrous metals.

Two important parameters are blade width and tooth pitch (TPI).

WIDTH: Always use the widest blade possible - it is stronger and will withstand greater feed pressure. For cut-off sawing this will be the widest blade the machine will allow. For contour cutting please refer to the abate black. to the chart below:

MINIMUM RADIUS	BLADE WIDTH
2½ "	1⁄2"
11/16"	3/8"
3/4"	1/4"
1/2"	3/16"
3/8"	1/8"

TPI: The tooth pitch is determined by the material being cut and its thickness

For wood and plastic a minimum of 3 teeth should be in the cut, e.g. for wood $\prime\!\!\!\!\!\!\!2''$ thick, use a 6TPI blade.

For metal between 4 and 20 teeth should be in the cut depending on the material.

In general use for soft or thick materials use coarse teeth (e.g. 3, 4 or 6TPI).

nber

301

For hard materials and thin sections use fine teeth (e.g. 10, 14 or $24\mbox{TPI}).$

 When selecting TPI remember:

 More TPI give a smoother but slower cut

 Fewer TPI allow a faster cut but with a slightly rougher finish

 At least three teeth should be in the work piece

COARSE (SKIP-TOOTH): 3 or 4TPI, 95% of woodworking TPI's are skip teeth, they have a full, round bottomed, deep gullet to allow for maximum clearance of material and prevent stress cracking of the blade

REGULAR TOOTH: 6 or 8TPI, are used for cutting thin sections or hard woods, achieving a smoother finish, or for cutting plastics and non-ferrous metals

FINE TOOTH: 10TPI, are used for cutting thin sections or hard woods, achieving an extremely smooth finish, or for cutting plastics and non-ferrous metals.





Regular & Fine Tooth





SCROLL SAW BLADES

PIN-END: Blades are easily inserted and removed from the machine. These blades allow the cutting of a relatively tight radius in hard and soft woods as well as certain fibres and plastics.

PLAIN-ENDS: Blades tend to be narrower, allowing the operator to produce a more intricate cut or pattern. These are also suitable for hard or soft woods, as well as certain fibres and plastics.

REGULAR TOOTH: Which as the name suggests is the most common, tends to be used for both cut-off and contour sawing of most materials.

SKIP TOOTH: These blades, on the other hand, provide a faster cut giving a bigger clearance and a smoother finish. **REVERSE SKIP TOOTH:** Blades provide the same, but also ensure a splinter-free, smooth finish on both the top and bottom sides of the cut.

	Regular Tooth	
2		
	Skip Tooth	
	Devery Chin Te ath	

Reverse Skip Tooth

PLANER / THICKNESSER BLADES

•

DISPOSABLE: These blades tend to be thinner in profile and have two cutting edges. Generally supplied in pairs.



RESHARPENABLE: As the name suggests these are re-usable blades. They tend to be thicker in profile with one cutting edge. As with disposable blades they are generally supplied in pairs, or in some cases in sets of three (e.g. 01418) depending on size and type of cutting block.







SIP Sanding Belts							
SIP Code	DESCRIPTION	Suitable for SIP Sanders*	Barcode Number				
4" x 36" BELTS	4" x 36" BELTS						
07740	Fine 120 Grit	01362, 01926, 01946	5012713077403				
07744	Coarse 60 Grit	01362, 01926, 01946	5012713077441				
6" x 48" BELTS							
06270	Fine 120 Grit	01331, 01943	5012713062706				
06868	Medium	01331, 01943	5012713068685				
06870	Coarse	01331, 01943	5012713068708				



SIP	Sanding	Discs
-----	---------	-------

SIP Code	DESCRIPTION	Suitable for SIP Sanders*	Barcode Number			
8" DISCS						
06837	Fine 150 Grit	01926, 01946	5012713068371			
06839	Medium 120 Grit	01926, 01946	5012713068395			
06841	Coarse 60 Grit	01926, 01946	5012713068418			
10" DISCS						
06864	Fine 150 Grit	01331, 01943	5012713068647			
06862	Medium 120 Grit	01331, 01943	5012713068623			
12" DISCS						
06896	Medium 80 Grit	01336, 01953	5012713068968			
*may be used with non-SIP equipment - please check your user manual						



SIP Morticing Chisels

SIP Code	DESCRIPTION	Suitable for SIP Morticers*	Barcode Numbe
06820	1/4" Chisel & Bit Set	01944, 01950	501271306820
06822	3/8" Chisel & Bit Set	01944, 01950	501271306822
06824	1/2" Chisel & Bit Set	01944, 01950	501271306824
06826	5/8" Chisel & Bit Set	01944, 01950	501271306826

Available	e NOW!			4. 300			
	D U C T A L O G U E		R O D U C T T A L O G U E	10 M /	O D U C T A L O G U		P R O D U C T A T A L O G U E
	ELDING ALWORK		LIFTING & UTOMOTIVE	100	MPRESSC TOOLS	DRS (ATING & FANS GENERATORS PRESSURE WASHERS /ATER PUMPS
Conve Millimetres to	rsion Ta	bles					
Millimetres (mm) Inches (ins)	Millimetres	(mm) Inches (ins)	Millimetres (mm) Inches (ins	s) Millimetres	(mm) Inches (ins)
1	0.039	7	0.276	40	1.575	100	3.937
2	0.079	8	0.315	50	1.969	200	7.874
3 4	0.118	9 10	0.354	60 70	2.362	300	<u> </u>
5	0.197	20	0.787	80	3.150	500	19.685
6	0.236	30	1.181	90	3.543	1000	39.37
Metres to Feet							
Metres (m)	Feet (ft)	Metres (m)	Feet (ft)	Metres (m)	Feet (ft)	Metres (m)	Feet (ft)
1	3.281	6	19.685	20	65.617	70	229.659
2	6.562	7	22.966	30	98.425	80	262.467
3	9.843	8	26.247 29.528	40 50	131.234 164.042	90	295.276 328.084
5	16.404	10	32.808	60	196.85		320.004
Bar to PSI			- 1 1 1				
Bar	PSI	Bar	PSI	Bar	PSI	Bar	PSI
1	14.5	6	87.02	20	290.1	70	1015
2	29.01	7	101.5	30 40	435.1	80	1160
3	43.51	8	116	50	580.2 725.2	100	1305 1450
5	72.52	10	145	60	870.2	150	2176
Kilograms to S	itones/Pounds/Ounc	es					
Kilograms (kg)	Stones/Ibs/oz	Kilograms (Kilograms (kg)	Stones/Ibs		(kg) Stones/Ibs/oz
2	2 lb 3 oz 4 lb 6 oz	10 20	1 st 8 lbs 3 st 2 lb	60 70	9st 6lbs 11st 00lb	200	31st 69lb 47st 34lb
4	8 lb 13 oz	30	4 st 10 lbs	80	12st 8lb	400	62st 138lb
6	13 lb 3 oz	40	6st 4lbs	90	14st 2lb	500	78st 103lb
8	1 st 3 lb 10 oz	50	7st12lbs	100	15st10lb	1000	157st 66lb
Horsepower to	Kilowatt						
Horsepower (HP) Kilowatt (kW 1 0.746		kW)	Horsepower (HP) 6		Kilowatt (kW) Horsep		Kilowatt (kW) 8.203
2 1.491		H. H. LAL	7		1	.2	8.948
3 2.237			8	5.220 5.966		.3	9.694
4 2.983 5 3.729			9 10	6.711 7.457		.4	10.440 11.186
0							
Conversion Gu	Ide						
To Convert Fron Bar	n:			ultiply By 14.503	To Convert To PSI - Pounds		

Bar	14.503	PSI - Pounds per sq. inch
PSI - Pounds per sq. inch	0.069	Bar
L/s - Litres per second	2.119	CFM - Cubic feet per minute
CFM - Cubic feet per minute	0.472	L/s - litres per seconds
L/m - litres per minute	0.035	CFM - Cubic feet per minute
CFM - Cubic feet per minute	28.316	L/min - Litres per minute
Kilowatts (kW)	1.34	Horsepower (hp)
	100	Centimetre (cm)
	3.281	Feet (ft)
Metres (m)	39.37	Inches (in.)
	1.094	Yards (yd)
	0.1	Centimetres (cm)
Millimetres (mm)	0.039	Inches (in)
	0.001	Metres (m)
Pounds (lb)	0.454	Kilograms (kg)
Kilograms (kg)	2.205	Pounds (lb)

SIP (INDUSTRIAL PRODUCTS) LIMITED

Gelders Hall Road, Shepshed, Loughbrorough, Leicestershire LE12 9NH UK

www.sip-group.com

GENERAL ENQUIRIES

Tel: 01509 500300 Fax: 01509 503154

SALES

Tel: 01509 500500 Fax: 01509 500456 Email: sales@sip-group.com

TECHNICAL / AFTER-SALES SERVICE Tel: 01509 500400 Fax: 01509 500456 Email: technical@sip-group.com

EXPORT

Tel: +44 (0)1509 500321 Fax: +44 (0)1509 500333 Email: export@sipindustrial.com



f У You Tube

Facebook: www.facebook.com/sipindustrial Twitter: @sipindustrial YouTube: www.youtube.com/siptechzone

your nearest SIP distributor is:





Every reasonable effort is made to present current and accurate information at the time of print. However, SIP do reserve the right to change details or specifications without prior notice. Photographs are for illustration purposes only.

E & OE. Contents and images are copyright © SIP Ltd. and cannot be reproduced without express written permission.

Design, photography & illustration by SIP Design

Job No.: MB01154-07-18





PROUD PRODUCT SPONSOR